

WONDER

awex
EMERGENCY LIGHTING



AC
220-240V
50-60Hz

LED

IP20

IK08



MATERIALS

White polycarbonate body
Opal or transparent polycarbonate cover

MOUNTING

Surface
Optionally recessed ⁽¹⁾
Optionally recessed in concret ⁽²⁾

POWER SUPPLY

Self contained – 220 - 240VAC/50 - 60Hz

LIGHT SOURCE

1W, 2W, 3W LED
Colour temperature: 6000K
Lifetime: 50000h

CHARGING

max. 24h

AUTONOMY AND BATTERIES

1h or 3h, 3,6V batteries

INSULATION CLASS

II

IP & IK RATING

IP20, IK08

AMBIENT TEMPERATURE

t_a : 0°C ÷ 40°C


OPTIONS

SE – non maintained • SA – maintained • PT – manual test button

ADDITIONAL INFORMATION

LED indicator signalizes mains power supply and battery charge • Deep discharge protection • Optional connection to Inhibit or Telecomando • ⁽¹⁾ see accessory for recessed mounting • ⁽²⁾ see accessory for concret mounting

DIMENSIONS [mm]

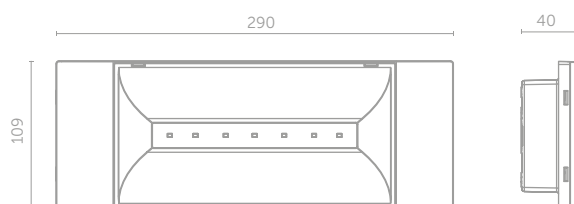

SELF-CONTAINED CONFIGURATION

STANDARD	CODE	POWER	MODULE	AUTONOMY [h]		MODE		OPTIONS		COLOR
				1	3	SE	SA	PT	X	
STANDARD	WND	1W	C	1	3	SE	SA	PT	X	WT
		2W	C	1	3	SE	SA	PT	X	WT
		3W	C	1	3	SE	SA	PT	X	WT

OUTPUT IN EMERGENCY MODE [lm]



STANDARD	POWER	OUTPUT
2W	290	
3W	390	

LEGEND:

- WND fitting WONDER with optics for open area
- C electronic gear for STANDARD self-contained fittings
- SE non maintained
- SA maintained
- PT manual test button
- X fitting without additional options
- WT white body and transparent cover

WONDER EXAMPLE OF PHOTOMETRY

Optic for open area

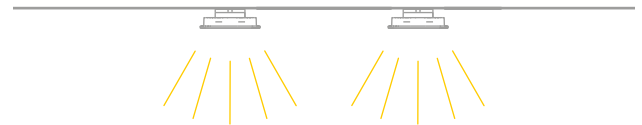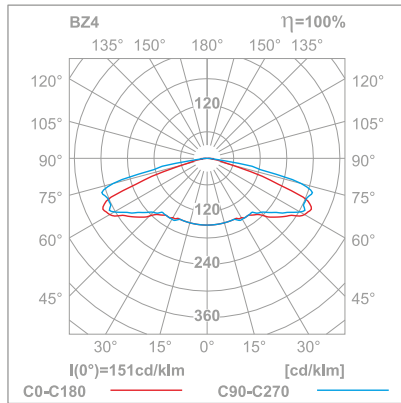

simulation for four luminaires and min 0,5 lx (area)

