

# TOK Q

## Installazione

Installation  
Installation

## Terra - Palo Ø60

Ground - Ø60 post  
Sol - Poteau Ø60

## Materiali

Materials  
Materiels

## Materiale Corpo: Alluminio | Tipo di diffusore: PMMA | Trattamento: Bordo mare

Material: Aluminium | Diffuser type: PMMA | Treatment: Sea treatment  
Matériel du corps: Aluminium | Type de diffuseur: PMMA | Traitement: Bord de mer

## Alimentazione

Power supply  
Alimentation

220-240 V

## Versioni

Versions  
Versions

## Cavo Alimentazione: 1 metro H05RN-F

Power cable: 1 m H05RN-F

Câble d'alimentation: 1 m H05RN-F



**TOK Q**  
H150



**TOK QL**  
H150



**TOK Q2L**  
H150



**TOK Q**  
H400



**TOK QL**  
H400



**TOK Q2L**  
H400



**TOK Q**  
H700



**TOK QL**  
H700



**TOK Q2L**  
H700



**TOK Q**  
H1000



**TOK QL**  
H1000



**TOK Q2L**  
H1000

## COLOURS



**Bianco RAL 9010**  
White RAL 9010  
Blanc RAL 9010



**Grigio High Tech RAL 9006**  
Grey High Tech RAL 9006  
Gris High Tech RAL 9006






**Grigio antracite RAL 7021**  
Grey anthracite RAL 7021  
Gris anthracite RAL 7021



**Corten**  
Corten  
Corten




### Tok Q H150

IP66 IK 10 20J xx9 CE UK ER	LED			COL.	CODE *	
	W	LM	REAL LM			
	14	1920	630		<input type="checkbox"/> LL12810W <input type="checkbox"/> LL12810G <input type="checkbox"/> LL12810E <input type="checkbox"/> LL12810K	

\* Complete the CODE     LED COLOUR    N | 4000K    3 | 3000K    2 | 2700K    1 | 2200K




Emissione luminosa 360°. | Light beam 360°. | Angle d'éclairage 360°.

### Tok QL H150

IP66 CE UK ER IK 10 20J xx9	LED			COL.	CODE *	
	W	LM	REAL LM			
	5	480	140		<input type="checkbox"/> LL12811W <input type="checkbox"/> LL12811G <input type="checkbox"/> LL12811E <input type="checkbox"/> LL12811K	




\* Complete the CODE     LED COLOUR    N | 4000K    3 | 3000K    2 | 2700K    1 | 2200K

### Tok Q2L H150

IP66 IK 10 20J xx9 CE UK ER	LED			COL.	CODE *	
	W	LM	REAL LM			
	8	960	180		<input type="checkbox"/> LL12812W <input type="checkbox"/> LL12812G <input type="checkbox"/> LL12812E <input type="checkbox"/> LL12812K	

\* Complete the CODE     LED COLOUR    N | 4000K    3 | 3000K    2 | 2700K    1 | 2200K

### Tok Q H400

IP66 IK 10 20J xx9 CE UK ER	LED			COL.	CODE *	
	W	LM	REAL LM			
	14	1920	630		<input type="checkbox"/> LL12813W <input type="checkbox"/> LL12813G <input type="checkbox"/> LL12813E <input type="checkbox"/> LL12813K	

\* Complete the CODE     LED COLOUR    N | 4000K    3 | 3000K    2 | 2700K    1 | 2200K

Emissione luminosa 360°. | Light beam 360°. | Angle d'éclairage 360°.

## Tok QL H400

IP66 IK 10 20J xx9 CE UK ER	LED			COL.	CODE *	
	W	LM	REAL LM			
	5	480	140	⊕ ⊖ 220-240 V	LL12814W□ LL12814G□ LL12814E□ LL12814K□	

\* Complete the CODE  LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

## Tok Q2L H400

IP66 IK 10 20J xx9 CE UK ER	LED			COL.	CODE *	
	W	LM	REAL LM			
	8	960	180	⊕ ⊖ 220-240 V	LL12815W□ LL12815G□ LL12815E□ LL12815K□	

\* Complete the CODE  LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

## Tok Q H700

IP66 IK 10 20J xx9 CE UK ER	LED			COL.	CODE *	
	W	LM	REAL LM			
	14	1920	630	⊕ ⊖ 220-240 V	LL12816W□ LL12816G□ LL12816E□ LL12816K□	

\* Complete the CODE  LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K






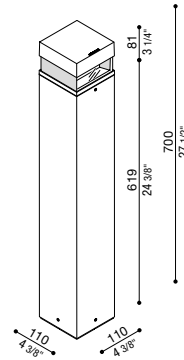
Emissione luminosa 360°. | Light beam 360°. | Angle d'éclairage 360°.

## Tok QL H700

IP66 IK 10 20J xx9 CE UK ER	LED			COL.	CODE *	
	W	LM	REAL LM			
	5	480	140	⊕ ⊖ 220-240 V	LL12817W□ LL12817G□ LL12817E□ LL12817K□	






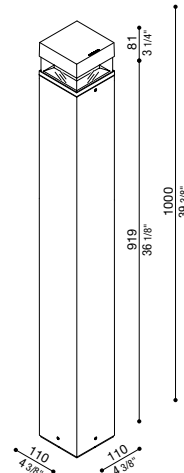
\* Complete the CODE  LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

### Tok Q2L H700

<b>IP66 IK 10 20J xx9</b> CE UK ER 	LED			COL. CODE *  LL12818W□  LL12818G□  LL12818E□  LL12818K□	
	W	LM	REAL LM		
	8	960	180	⊕ ⊙ 220-240 V	

\* Complete the CODE     LED COLOUR    N | 4000K    3 | 3000K    2 | 2700K    1 | 2200K






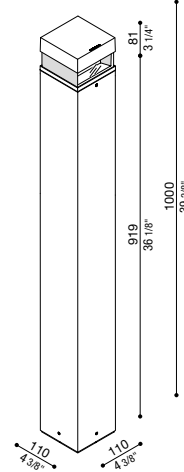
### Tok Q H1000

<b>IP66 IK 10 20J xx9</b> CE UK ER 	LED			COL. CODE *  LL12819W□  LL12819G□  LL12819E□  LL12819K□	
	W	LM	REAL LM		
	14	1920	630	⊕ ⊙ 220-240 V	

\* Complete the CODE     LED COLOUR    N | 4000K    3 | 3000K    2 | 2700K    1 | 2200K    1 | 2200K

Emissione luminosa 360°. | Light beam 360°. | Angle d'éclairage 360°.

### Tok QL H1000

<b>IP66 IK 10 20J xx9</b> CE UK ER 	LED			COL. CODE *  LL12820W□  LL12820G□  LL12820E□  LL12820K□	
	W	LM	REAL LM		
	5	480	140	⊕ ⊙ 220-240 V	

\* Complete the CODE     LED COLOUR    N | 4000K    3 | 3000K    2 | 2700K    1 | 2200K

## Tok Q2L H1000

IP66 IK 10 20J xx9 CE UK ER	LED			COL.	CODE *	
	W	LM	REAL LM			
	8	960	180		LL12821W□	
					LL12821G□	
					LL12821E□	
					LL12821K□	

\* Complete the CODE □ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K


## Accessori | Accessories | Accessoires

### Staffa Tok Q in acciaio

Tok Q steel fixing base

Base de fixation en acier pour Tok Q

CoL.	Code
-	LB1280004



### Morsettiera coassiale

Morsettiera coassiale a 3 poli, IP68, per cavo  $\varnothing$  7/12 mm.


Coaxial Terminal block

Coaxial 3-pole terminal block, IP68, for cable diameter 7/12 mm.

Bornier coaxial

Bornier coaxial à 3 pôles, IP68, pour câble diam. 7/12 mm.

CoL.	Code
-	LB11293



### Morsettiera lineare a 3 vie

Morsettiera lineare a 3 vie a 3 poli, IP68, per cavo  $\varnothing$  7/13,5 mm.


3 way linear terminal block

3-way 3-pole linear terminal block, IP68, for cable  $\varnothing$  7/13.5 mm.

Bornier linéaire 3 voies

Bornier linéaire 3 voies à 3 pôles, IP68, pour câble diam. 7/13,5 mm.

CoL.	Code
-	LB11294





# FEATURES

**Predisposto per installazione su palo da Ø60 mm standard.**  
 Suitable for installation on standard post Ø60 mm.  
 Prédisposé pour l'installation sur Poteau standard Ø60 mm.


## ↘ TOK



## ↘ TOK Q




### TOK



**Base di fissaggio compresa**  
 Fixing base included  
 Base de fixation incluse

**Palo da Ø60 mm standard**  
 Ø60 mm standard post.  
 Standard Poteau Ø60 mm.

### TOK Q




**Base di fissaggio compresa**  
 Fixing base included  
 Base de fixation incluse

**Palo da Ø60 mm standard**  
 Ø60 mm standard post  
 Standard Poteau Ø60 mm




# FEATURES

## TOK

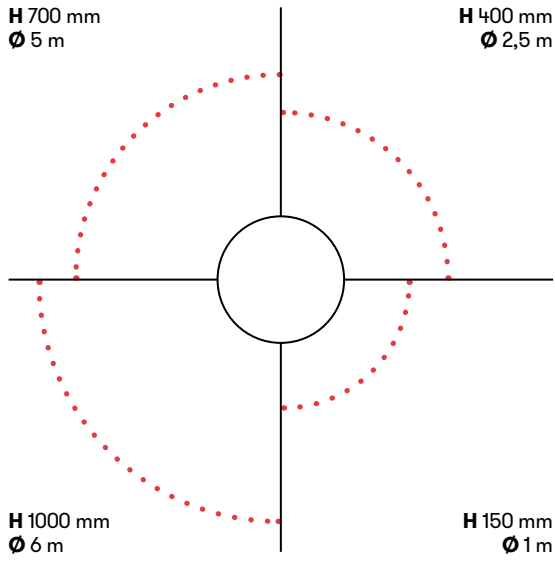


## TOK Q

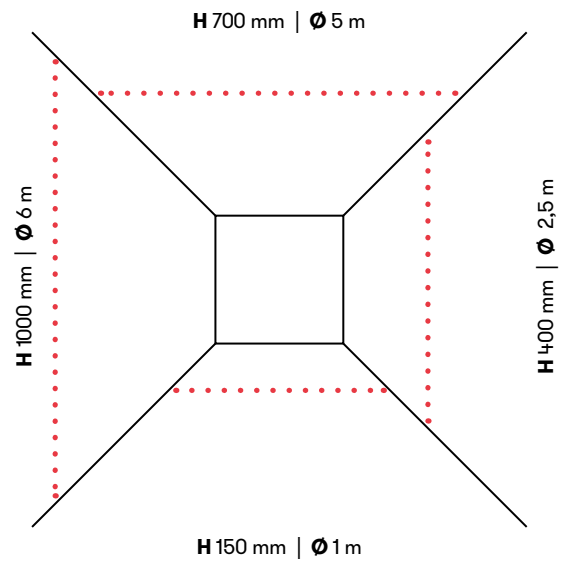

### Scegliendo diverse altezze, varia l'area illuminata.

By choosing different heights, the lit area changes.

En choisissant des hauteurs différentes, la zone éclairée change.

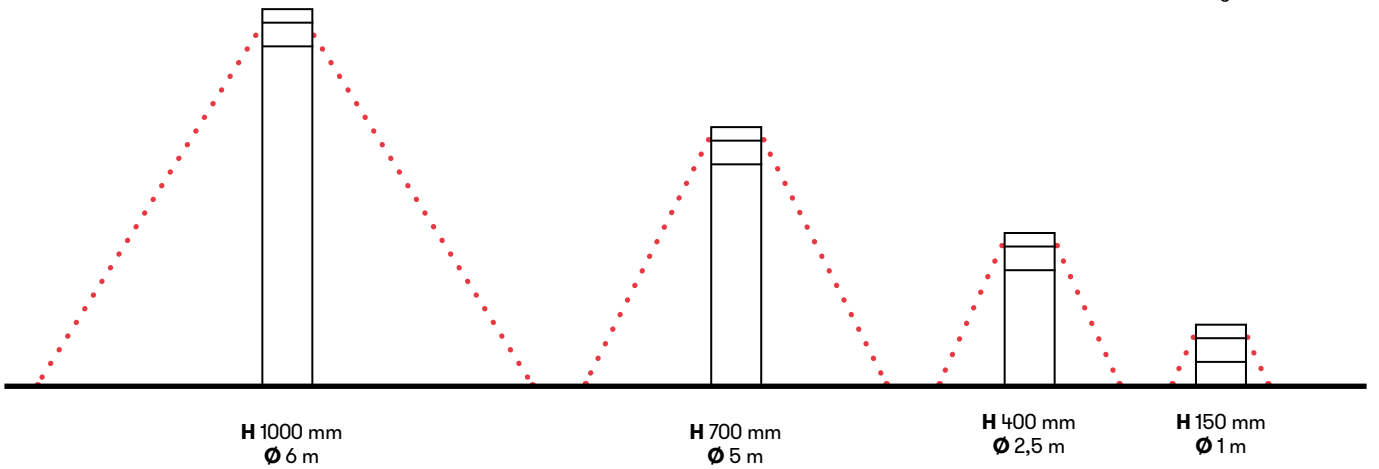

TOK  
Q



**Colori disponibili.**  
Available colours.  
Couleurs disponibles.